


NOTE: TRENCHING AND BACKFILLING SHALL BE PER STANDARDS SPECIFICATION

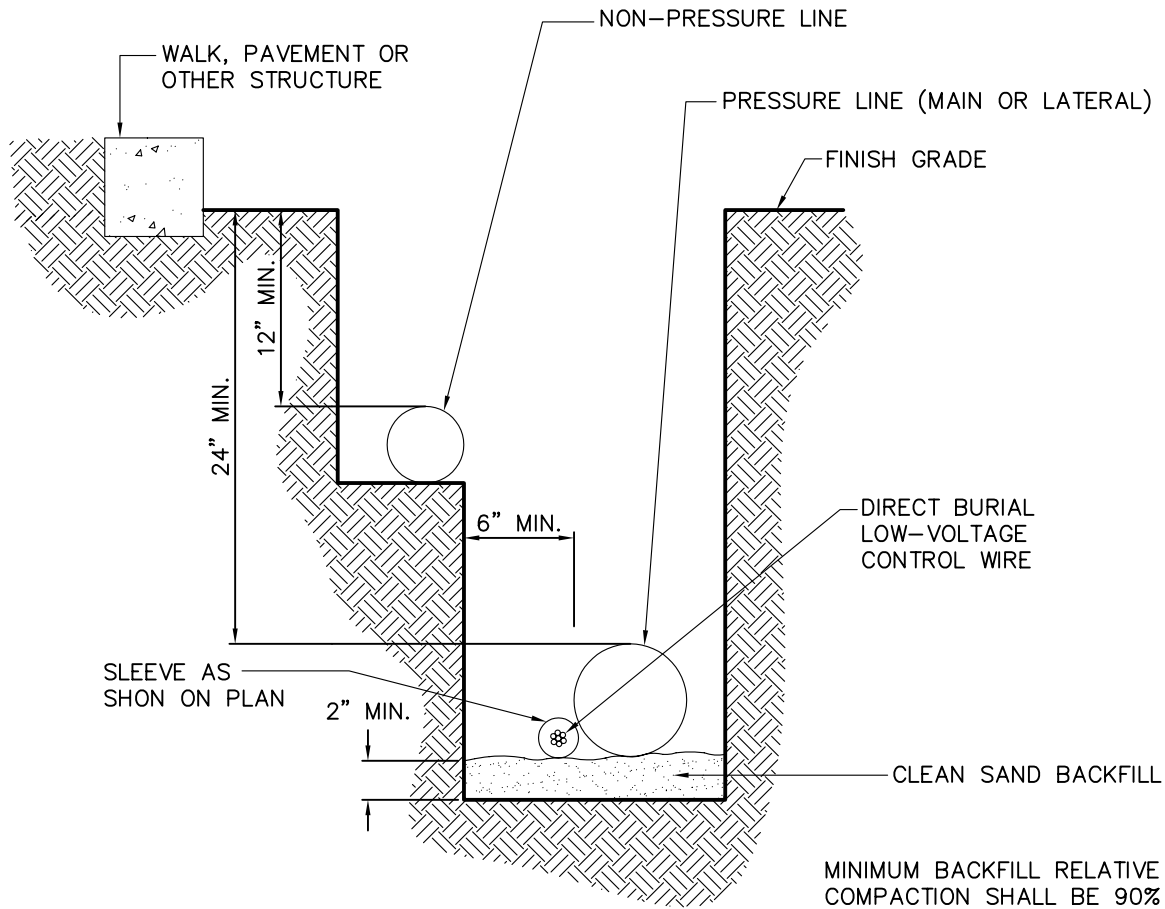

NOTE:

1. ALL PLASTIC PIPING TO BE SNAKED IN TRENCHES
2. BUNDLE & TAPE WIRING AT 10' INTERVALS
3. TIE A LOSSE 20" LOOP IN WIRING AT CHANGE OF DIRECTION GREATER THAN 30°. UNTIE ALL LOOPS AFTER ALL CONNECTIONS HAVE BEEN MADE.
4. INSTALL ALL CONTROL WIRE ON THE UNDERSIDE OF THE MAINLINE PIPE.
5. SEE IRRIGATION SPECIFICATIONS FOR BACKFILL AND COMPACTION REQUIREMENTS.
6. PIPE DEPTH FOR PRESSURE MAINLINE SHALL BE 24" MINIMUM.
7. PIPE DEPTH FOR NON-PRESSURE LATERAL LINES SHALL BE 12" MINIMUM.
8. PIPE DEPTH FOR ALL LINES UNDER PAVEMENT SHALL BE 24" MINIMUM.

TRENCHING

REVISIONS  
1-05-06

CITY OF KERMAN

STD.  
NO.  
L-5