





- NOTES:**
1. DRIVE SLEEVE AND ANCHOR PIECE TOGETHER.
 2. TOP OF ANCHOR AND SLEEVE SHALL REMAIN 1" TO 2" ABOVE FINISH GRADE.

INSTALLATION

SCALE = NONE

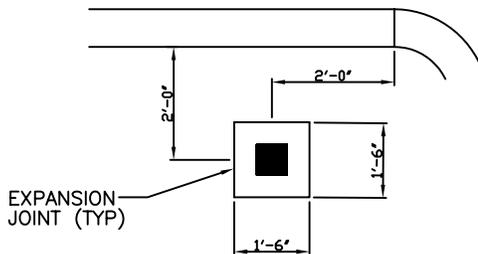

DETAIL 'A'

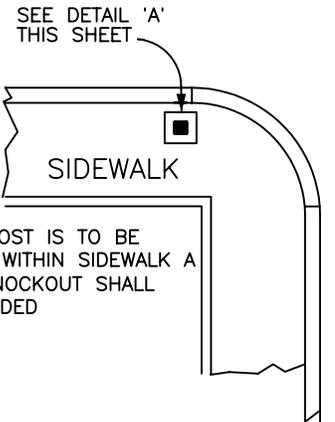

NOTE: WHEN POST IS TO BE LOCATED WITHIN SIDEWALK A 18x18 KNOCKOUT SHALL BE PROVIDED

TYPICAL LOCATIONS

STREET SIGNS SHALL BE LOCATED AT N.E. OR S.W. INTERSECTION CORNERS.

SHEET 1 OF 2
CITY OF KERMAN

STREET NAME SIGN

REVISIONS
12-8-05
05-26-11

STD.
NO.
P-20