


AFTER THE WELL HAS BEEN PROPERLY FILLED, THE EXCAVATION SHALL BE FILLED WITH NATIVE SOIL.

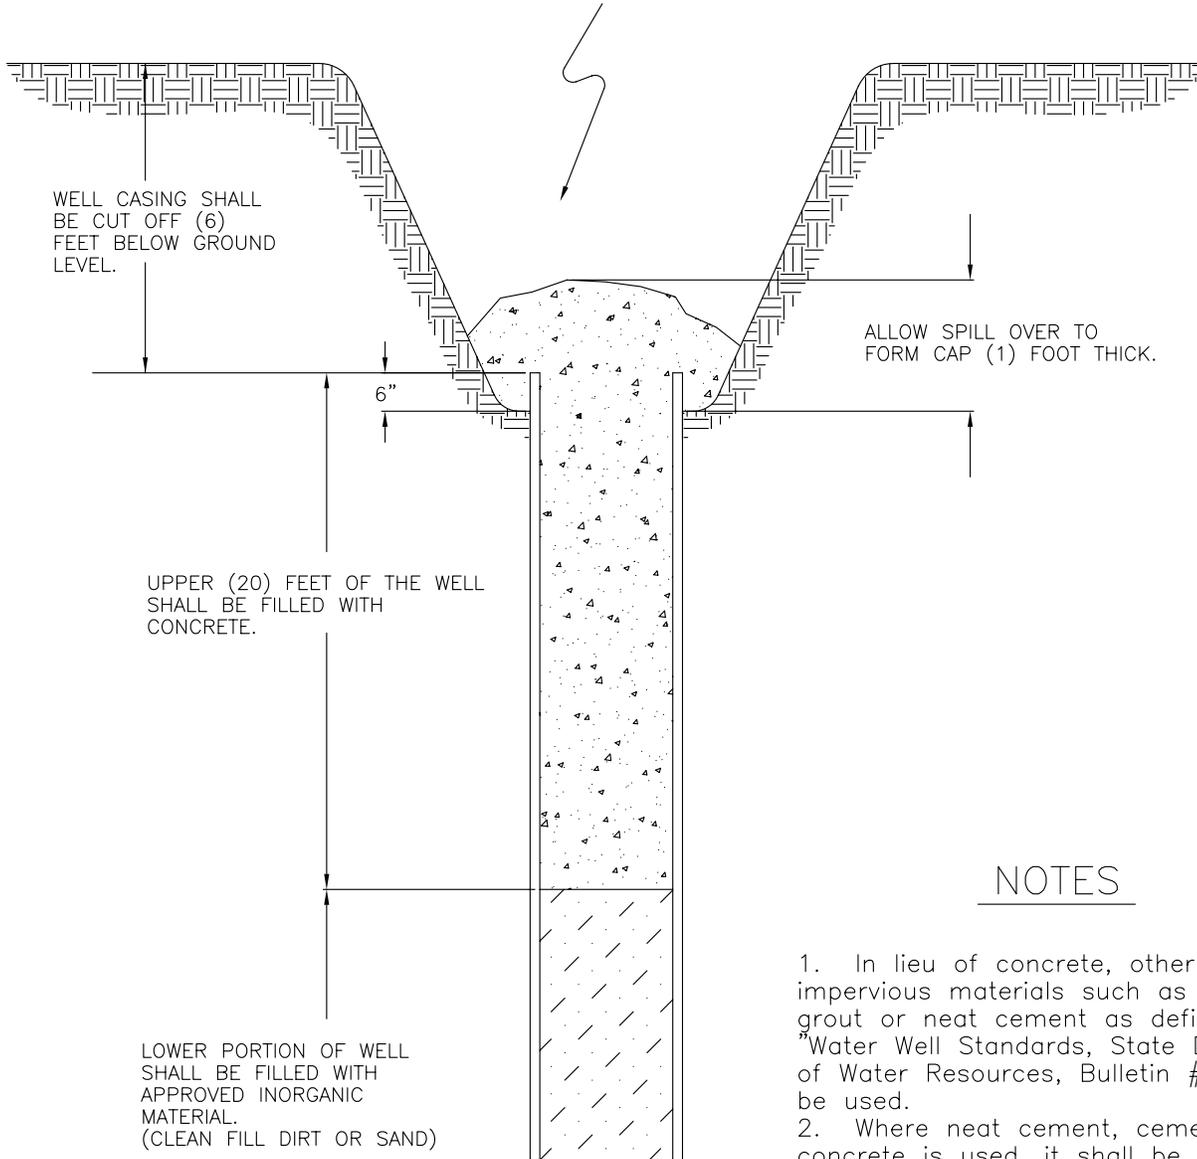

NOTES

1. In lieu of concrete, other suitable impervious materials such as cement grout or neat cement as defined in "Water Well Standards, State Department of Water Resources, Bulletin #74" may be used.
2. Where neat cement, cement grout, or concrete is used, it shall be poured in one continuous operation.
3. During periods when no work is being done on the well, such as overnight or while waiting for sealing material to set, the well and any surrounding excavation shall be covered. The cover shall be sufficiently anchored and strong enough to keep foreign material from entering the well.

WELL ABANDONMENT

REVISIONS
12-8-05

CITY OF KERMAN

STD
NO.
W-11