


| DESCRIPTION       | SIZE                | TABLE A | DESCRIPTION         | SIZE                 |
|-------------------|---------------------|---------|---------------------|----------------------|
| END POSTS         | 2-7/8" OD SCH. 40   |         | STRETCHER BAR BANDS | 1/8"x1"              |
| CORNER POSTS      | 2-7/8" OD SCH. 40   |         | STRETCHER BAR       | 1/4"x3/4"            |
| LINE POSTS        | 1-7/8" OD SCH. 40   |         | TRUSS ROD           | 3/8" DIA. ADJUSTABLE |
| TENSION WIRE      | 7 GAUGE REINFORCING |         | TENSION WIRE TIES   | 11 GAUGE @ 24" O.C.  |
| TOP RAILS         | 1-5/8" OD SCH. 40   |         | LINE POST TIES      | 6 GAUGE @ 14" O.C.   |
| CHAIN LINK FABRIC | 2x11x6'- 11 GAUGE   |         |                     |                      |
|                   |                     |         |                     |                      |
|                   |                     |         |                     |                      |

**NOTE:**

1. ALL MATERIALS HOT-DIP GALVANIZED (EXCEPT AS NOTED).
2. SLATTED FENCES SHALL BE EITHER SOLID VINYL OR WIDE SLATS WITH NO MORE THAN 1/4" BETWEEN SLATS.

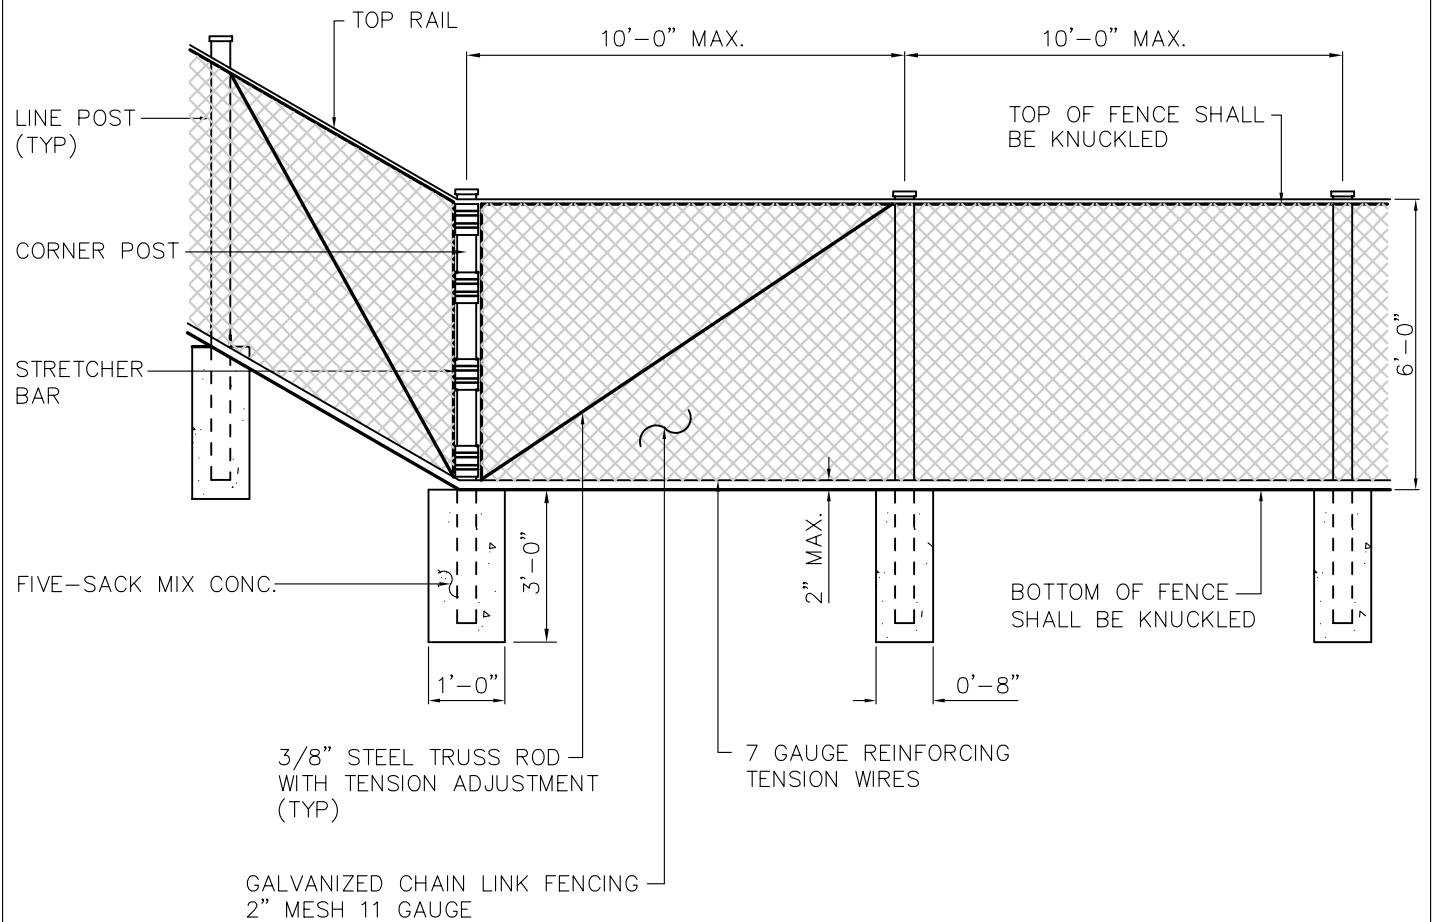


**TYPICAL FENCE ELEVATION**

SHEET 1 OF 2

|                     |                                          |                |      |
|---------------------|------------------------------------------|----------------|------|
| 6' CHAIN LINK FENCE | REVISIONS                                | CITY OF KERMAN | STD. |
|                     | 9-13-94<br>9-11-96<br>12-8-05<br>5-07-10 |                | N0.  |
| NO SCALE            |                                          |                | M-7  |

**NOTE:**

FOR MATERIAL TYPES AND SIZE SEE TABLE ON A ON SHEET 1

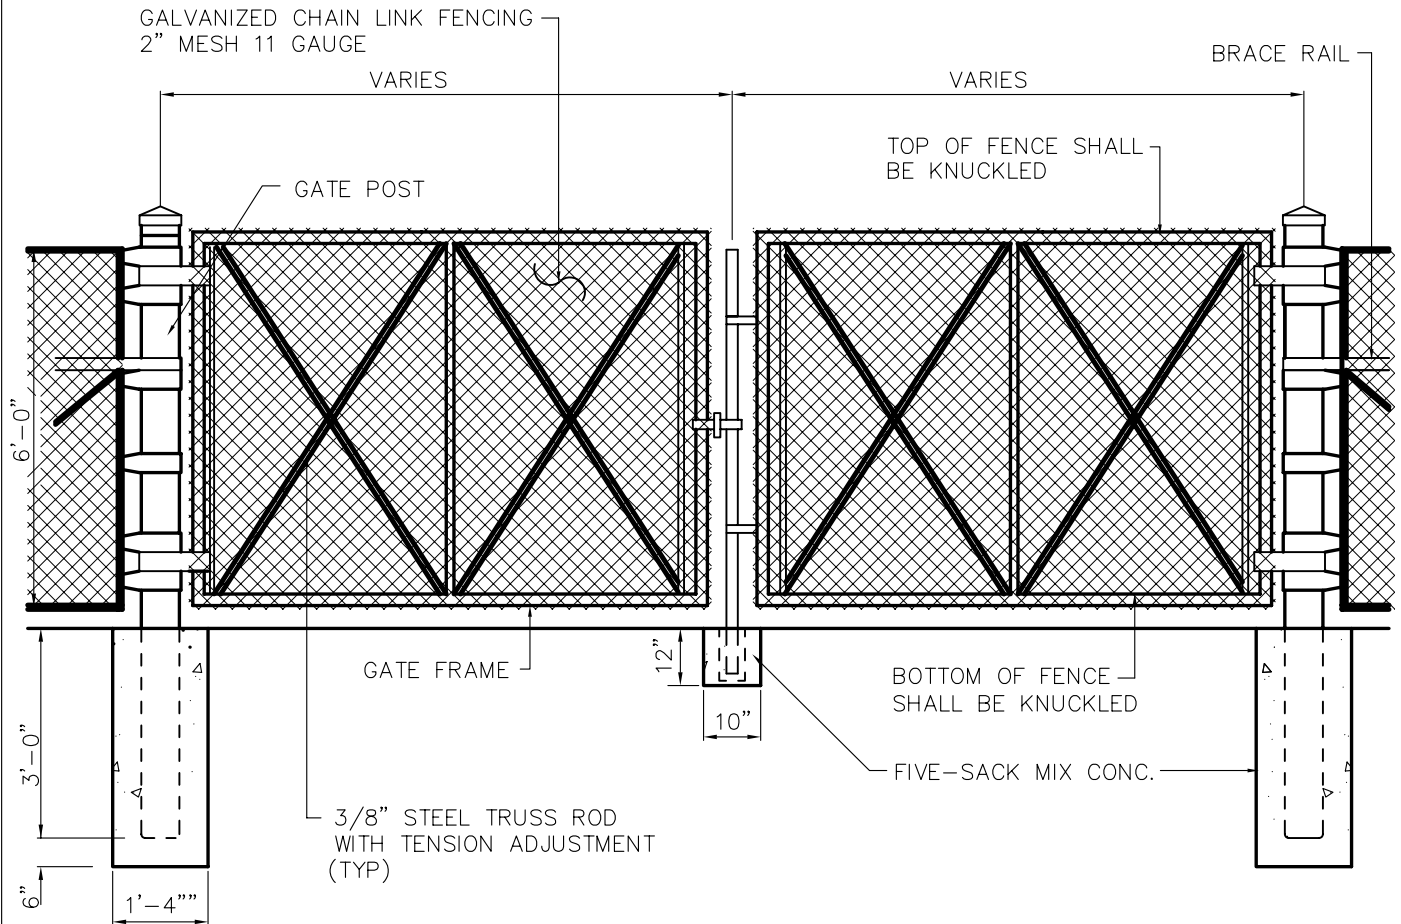

1. GATE POSTS TO BE SCH. 40 FOR GATES  
12' OR LESS DIA. = 4 1/2" O.D. FOR  
GATES WIDER THAN 12' = 5 1/2" O.D.
2. GATE FRAMES SHALL HAVE WELDED  
CONNECTIONS.

**TYPICAL FENCE ELEVATION**

SHEET 2 OF 2

6' CHAIN LINK FENCE

NO SCALE

REVISIONS  
09-13-94  
12-08-05  
03-23-10

CITY OF KERMAN

STD.  
NO.

M-7